


MODEL: CL8BAY

USER MANUAL

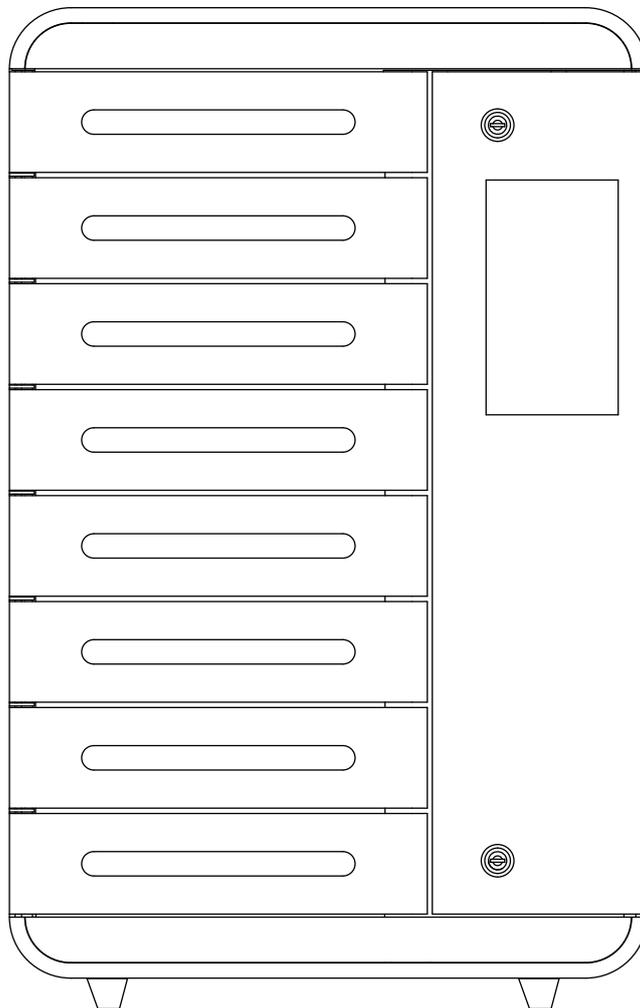

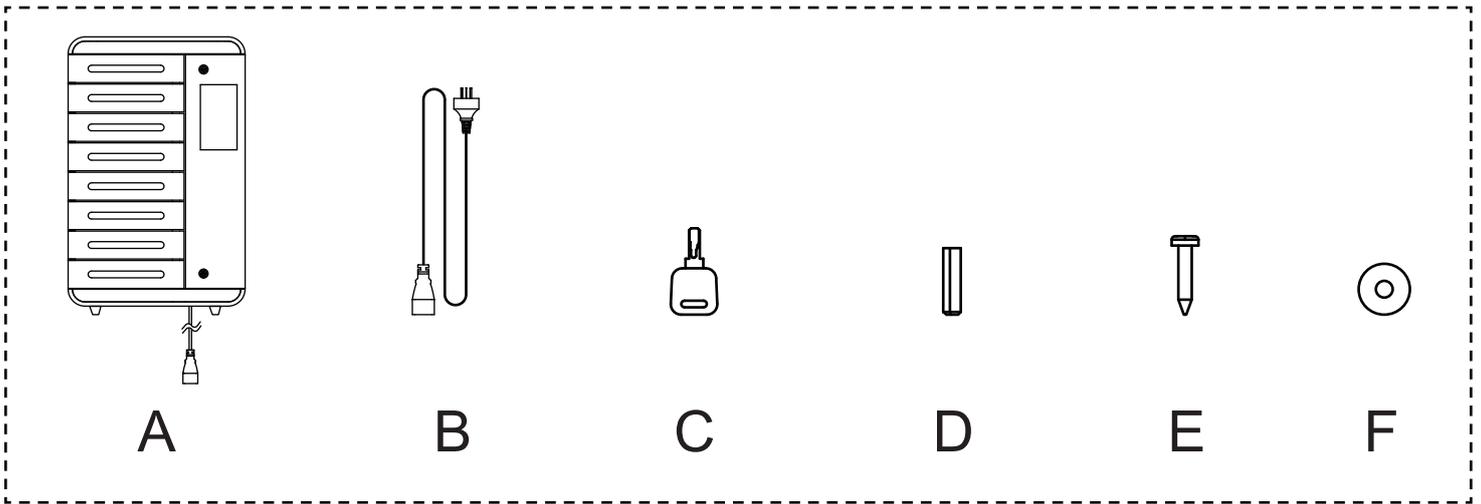

PART	QUANTITY
A: Charging Locker	1
B: Power Cord	1
C: Key	2
D: Plastic Plug	4
E: Screw A	4
F: Metal Sheet	4

P.S.: The Power Cord, Plastic Plug, Screw A and Metal Sheet were put in the 1st locker box.
Open the machine gate to open the 1st door to take out these parts.

SAFETY INFORMATION




ATTENTION!

We recommend a skilled electrician is used to assemble and disassemble the housing of the product to avoid risk of electric shock or electrical damage to the product.

- This product is not a toy and should not be used by children at any time. It contains small parts which can be swallowed and cause serious injury.
- Ensure the product is assembled and installed in a way that prevents a person tripping over the power cable or the unit falling from its location.
- Please ensure the packing materials are disposed off completely to prevent injury to children (such as box cuts or swallowing insulation materials).
- Do not install in an area with high temperature, high humidity or areas where the charging station may come into contact with water.
- Do not install near air conditioners, or in areas with excessive dust, smoke or vibration.
- Do not modify or alter the product in any way. Any unauthorized modification or alteration will immediately void the Warranty.
- Do not use the product, or any parts, if they are damaged.
- All cables and adaptors should be connected and disconnected slowly and carefully.
- Ensure suitable packaging for transport of the product based on its 'Specifications'.


1. Drill 3x holes of $\varnothing 6\text{mm}$ for 3x Plastic Plugs according to the sizes on the wall

2. Fix 2x Screw A in upper Plastic Plugs, leave an interval of 2mm between the screw

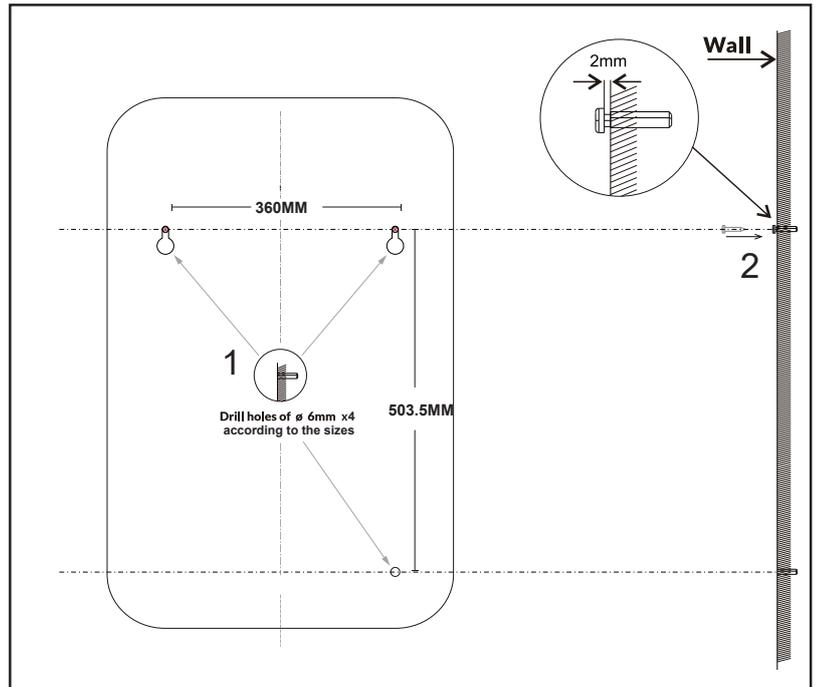


3. Hang the Charging Locker in the Screw A


4. Open the machine gate, fix the Charging Locker with 1x Screw A & Metal Sheet in the Plastic Plug.

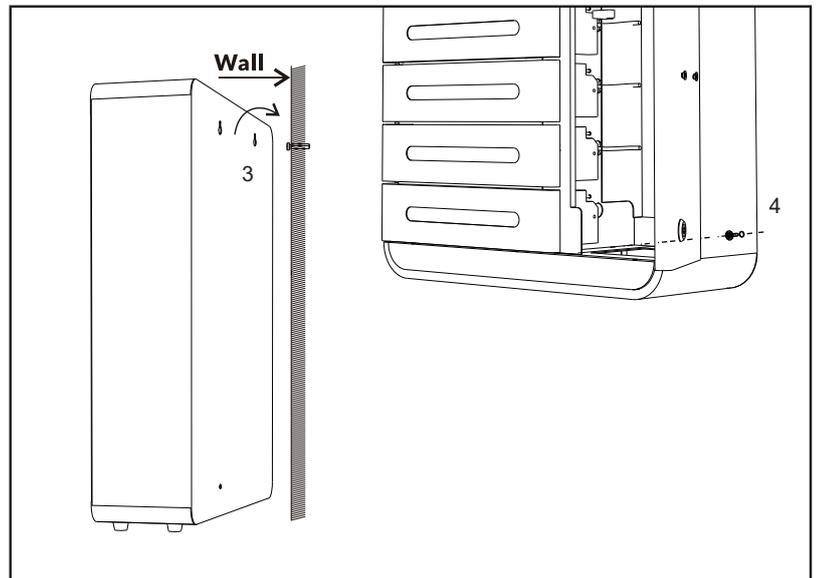


5. Connect power

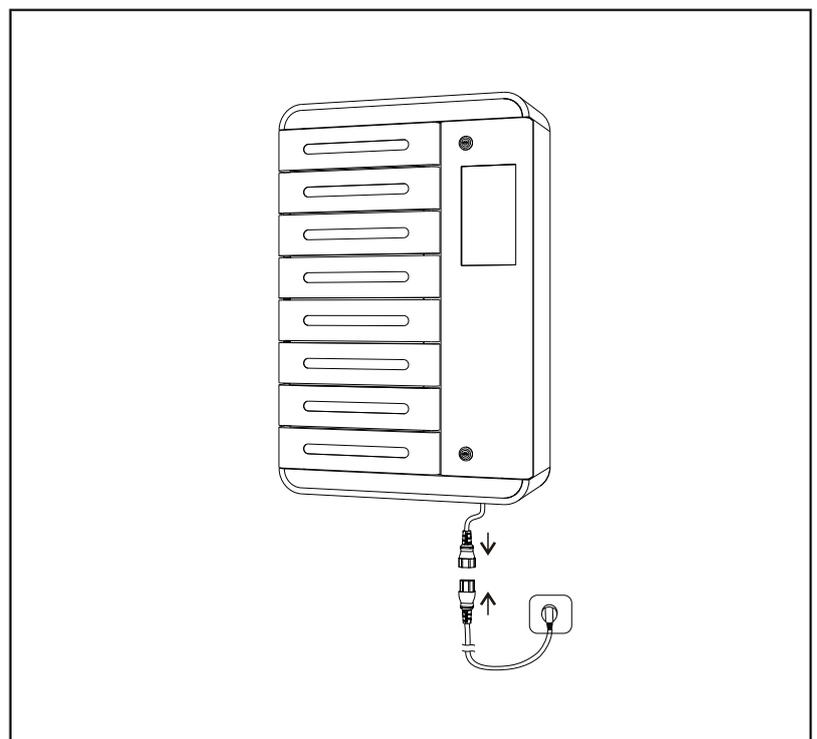

1. Open the locker door of the damaged cable.
2. Unscrew a screw to open the cable cover.
3. Replace a new cable.

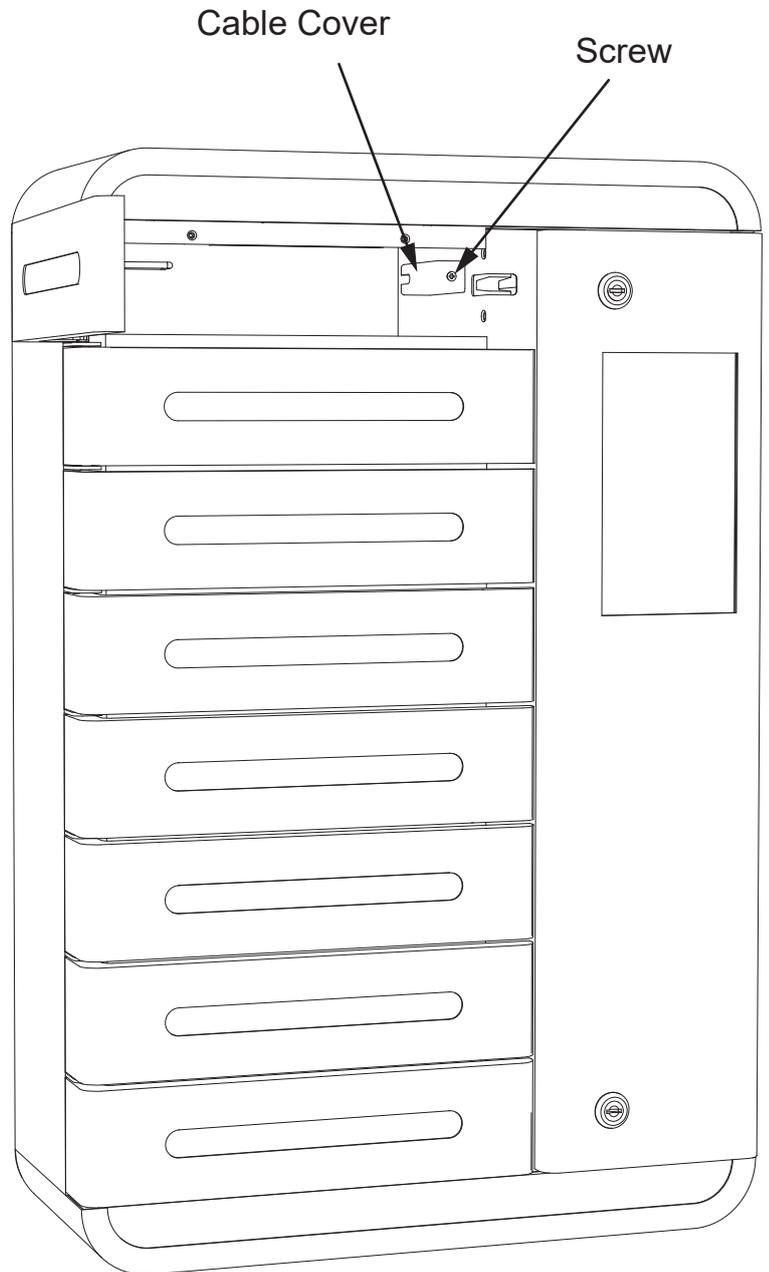

How to Charge or Retrieve



Click "Touch to start"

Click "CHARGE"

Click "RETRIEVE"

Disclaimer
A statement of responsibility for the use of charging cabinets generally includes the following:

1. Instructions for using the charging cabinet, including operating procedures, precautions, safety warnings, etc.
2. The laws, regulations, rules, and prohibitions that users need to comply with when using the charging cabinet.
3. Maintenance requirements for the charging cabinet, including regular inspection, cleaning, and maintenance.
4. Allocation of responsibilities for the charging cabinet, clarifying the responsibilities of the charging cabinet provider and the user.
5. Solutions for dealing with charging cabinet malfunctions, including contacting customer service, repairs, etc.
6. Warranty policies for the charging cabinet, including warranty periods, warranty coverage, etc.
7. Other matters that need to be declared such as usage restrictions, prohibited items, etc.

Before using the charging cabinet, users should carefully read and comply with all the content in the statement of responsibility for the use of charging cabinets to ensure the safety and smoothness of the charging process. If users encounter problems during the use of the charging cabinet, they should promptly contact the charging cabinet provider or customer service personnel for assistance.

RETURN **AGREE**

Click "AGREE"

18:58 12S

Welcome

Charge Your Device

1. Press the CHARGE button
2. Read the Disclaimer and press [Agree]
3. Select locker box
4. Enter a unique 4-6 digit PIN code
5. Enter PIN code again
6. Locker door will open
7. Please close the door before you leave

Retrieve Your Device

1. Press the Retrieve button
2. Select your locker box
3. Enter your PIN code
4. Your locker door will open
5. Please close the door before you leave

CHARGE **RETRIEVE**

Please select the cabinet to retrieve

1 Available	5 01:32:03
2 01:18:03	6 01:32:03
3 Available	7 Available
4 Available	8 01:32:03

RETURN

Select your Cabinet

Select Available Cabinet

Please select cabinet

1 Available	5 01:32:03
2 01:18:03	6 01:32:03
3 Available	7 Available
4 Available	8 01:32:03

RETURN

Welcome

5

Please enter a 4-6 digit password to confirm. Beware of people staring at you while operating.

1	2	3
4	5	6
7	8	9
return	0	confirm

Enter your own Digit Password

Enter 4~6 digit password to confirm

Welcome

5

Please enter 4-6 digit password to confirm. Beware of people staring at you while operate.

1	2	3
4	5	6
7	8	9
return	0	confirm

Cabinet 1 is open

Please remember to close the door after use


Close the door after use

Close the door after use

Cabinet 1 is open

Please remember to close the door after use


Administrative Mode




Click
"Touch to start"




Click the time(18:58)
3 times




Enter Admin Code:
00000000



Select below
modes

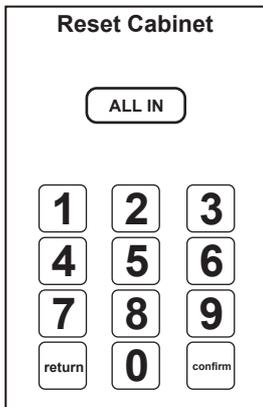


Click"1"

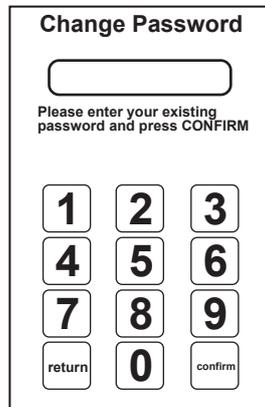


Click"2"




Click"3"

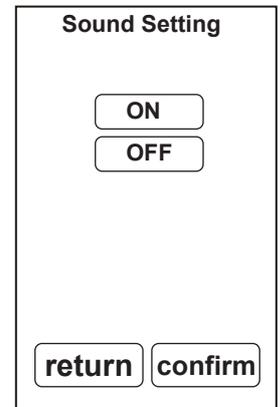


Click"4"

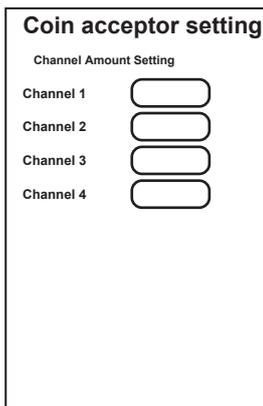


Click"5"

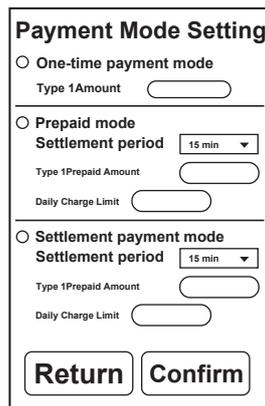

Click"6"

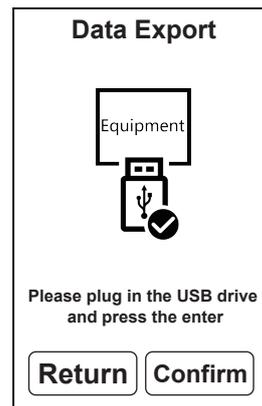


Click"7"




Click
"Touch to start"




Click the time(18:58)
3 times




Enter Admin Code:
00000000



Click "X"




Press right-click
for return.

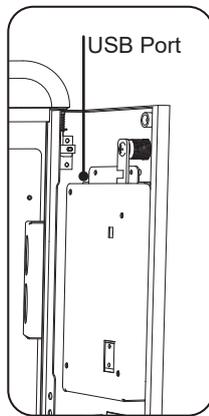


Open gate to connect
a mouse with USB port



Set up Wi-Fi/
Adjust Sound




Click "Setting"



Click "ZYChargeCabinet"

User Interface Customization

1. Open the Admin door, press to unplug the SD card
2. Read the SD card through PC, replace the corresponding files in the "src" folder

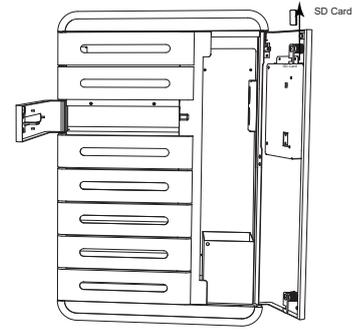

SD CARD > srcAppConfig > src

3. Delete file " splash" "adv""home" "disclaimer"
4. Replace the new files with correct format and same file name

Item	A:Boot screen	B:Standby screen	C:Operating instructions	D:Disclaimer
Demo				
Format	Picture: png	Picture: jpg , png Video: Mp4	Picture: jpg	Picture: jpg
File name	splash	adv	home	disclaimer

Note:

If you need to change the standby screen from picture to video, please also do below step.

Please find below path:

SD CARD > srcAppConfig > app_config.json

Use " Notepad" APP to open "app_config.json"

```
{
  "disclaimer_path": "",
  "qrcode": "/src/qrcode.png",
  "adv_type": "img",
  "adv": "/src/adv.jpg",
  "disclaimer": "/src/disclaimer.jpg",
  "home": "/src/home.jpg",
  "splash": "/src/splash.png"
}
```

Demo

"adv_type": "img" $\xrightarrow{\text{"img" change into "video"}}$ "adv_type": "video"

"adv": "/src/adv.jpg" $\xrightarrow{\text{"jpg" change into "mp4"}}$ "adv": "/src/adv.mp4"

5. Insert back the SD card and restart the screen