


Cafe Barrier Assembly Instructions

Product Drawing



Spare Part List

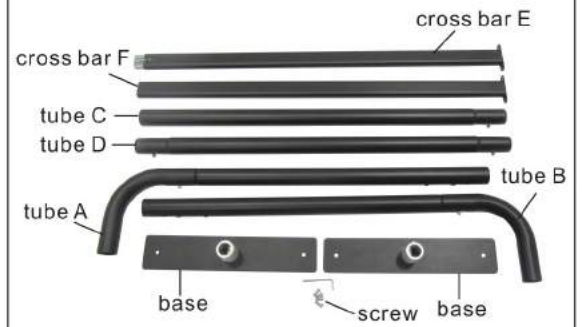

Assemble Instruction



1. Insert tube A and B into each of the bases.



2. Connect tube C with tube D.



3. Press the locking part, insert tube C and tube D into tube A and tube B.



4. Finished frame as pictured.



5. Connect cross bar E with cross bar F.




6. Tighten cross bar with screw driver.



7. Install the connected cross bar to the bottom of tube A and tube B.




8. Installed base and cross bar.

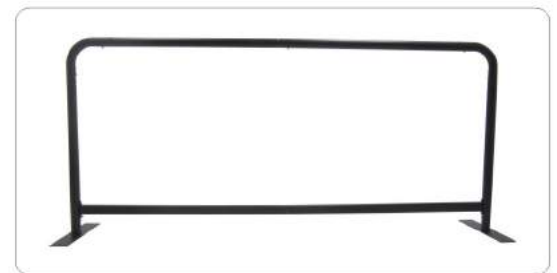

4. Finished frame as pictured.



10. Install the graphic from the top.

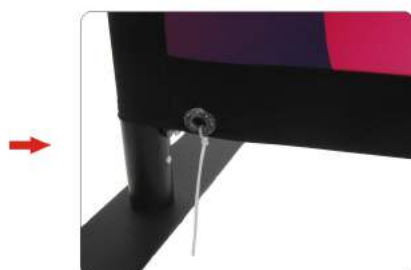

11. Fix the graphic with cable ties, then cut off the excess.



12. Finish Installation.