
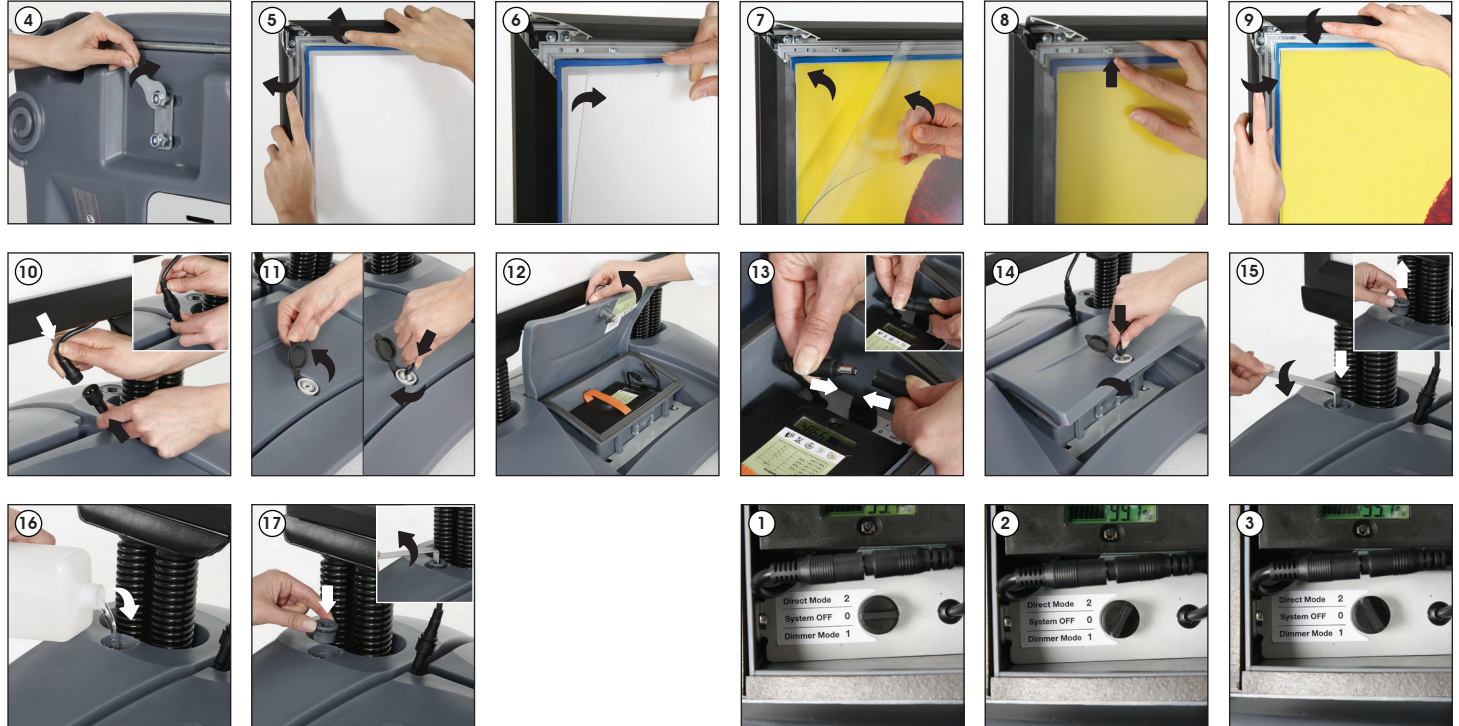


Installation Instructions

PSLEDSIGNA1 LED Pavement Sign

Each product includes

- 1 x Frame
- 1 x Water Base
- 1 x Battery
- 1 x RF Receiver
- 2 x Remote control
- 2 x Washer
- 4 x Nut M10
- 1 x 19 Spanner
- 1 x Drum cap wrench
- 1 x Key

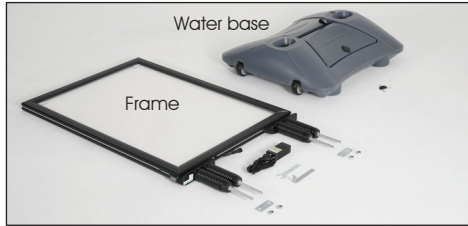

System off 0

Dimmer Mode 1: Remote control will be activate. The frame works with %50 or %100 bright.


Direct Mode 2: The battery connect directly to illumination. The frame works with %100 bright.

One button can shows four specifications



Capacity of Battery
(0 - 100 %)

Instant consumption
(0 - 2) Ampere

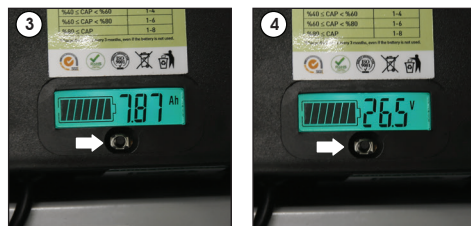

Capacity of battery
(0 - 8) Ampere/hour

Battery voltage
(20 - 26,6) Volt



- Working temperature shall be at -10°C ~ +50°C.
- Do not keep battery under high temperature or immerse in water, acidic liquid, etc.
- Please use enclosed charger to charge battery.
- Battery standard charge time is between 5-6 hours.
- Do not give battery impact or fling it.
- Do not connect the positive terminal and the negative terminal, as it may cause turn off the battery.
- If battery is not to be used for long period of time, please charge the battery every three months.
- Storage temperature shall be at 23°C±2.