

Easel Assembly Instructions






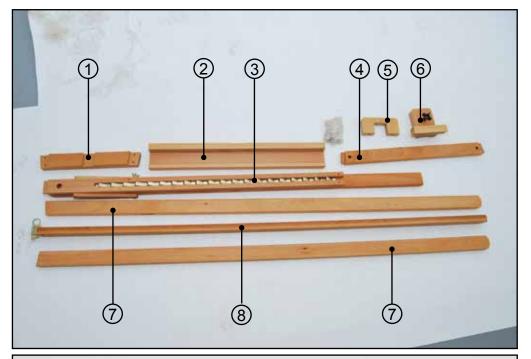


Easel Assembly Instructions




Assemble the sides to the centre frame using bolts supplied.




Screw the top of the sides to the centre frame.




Screw the bottom of the post to the easel lip.




Insert the spring and the cap into the hole at the top of the centre frame.




Slide the post into the grooved recess.



Bolt the back bracket to the easel lip using the spring and bolts provided.



Place the metal cap on the underside of the top header and slide it down the post.



Tighten the dial at the desired height.